


NISKONAPONSKI SKLOPNI BLOK ZA STUPNE TRAFOSTANICE



Niskonaponski sklopni blok koristi se za razvod električne energije u stupnim transformatorskim stanicama 10(20)/0,4 kV., s transformatorima snage do 250 kVA.

Sklopni blok predviđen je za pričvršćenje na čelično rešetkasti stup, izrađen od prokroma debljine 2 mm.

Blok je izrađen i tipski ispitan prema tehničkim normama HEP N.012.01 i standardu IEC 60439-1.

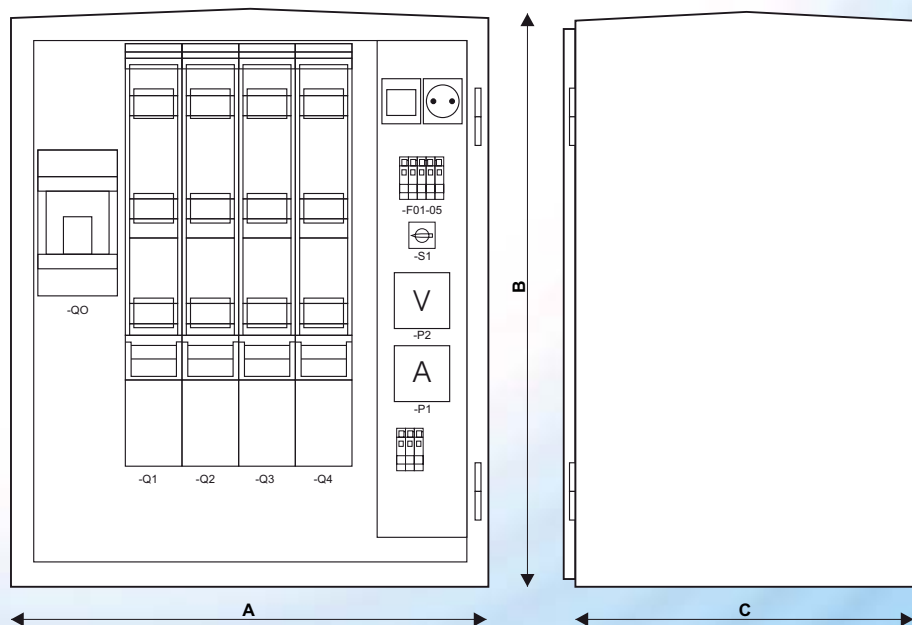

DIMENZIJE / DIMENSIONS (mm)	A	B	C
* NNSB ZA STUPNE TRAFOSTANICE	840	1020	600



TOMAS & CO d.o.o. SPLIT

Kopilica 9, SPLIT, CROATIA
 Tel. +385 21 490-643, fax 490-642
 www.tomas-co.com / e-mail: tomas-co@st.hinet.hr

TEHNIČKI PODACI	TEHNICAL DATA		
nazivni napon	rated voltage	V	400/231
nazivna frekvencija	rated frequency	Hz	50
nazivna snaga transformatora	rated current transformer	A	do (up to) 250
nazivna struja	rated curent	kVA	do (up to) 500
stupanj zaštite	degree of protection		IP 54
DOVODNO POLJE	INCOMING FEEDER	Standardna oprema Standard equipment	Oprema na zahtjev Equipment on request
*prekidač	*circuit-breakers	■	
*rastavna sklopka	*switch-disconnector		■
strujni transformatori	current transformers	■	
ampermetar	ammeter	■	
voltmetar s preklopnikom	voltmeter with selector switch	■	
svijetiljka	lemb	■	
utičnica	socket	■	
ODVODNO POLJE	OUTGOINGS FEEDER	Standardna oprema Standard equipment	Oprema na zahtjev Equipment on request
tropolna izolirana pruga 250A, osigurač-sklopka s istovremenim tropolnim isklapanjem za umetke velike prekidne moći	fuse switch disconnecter 250A	■	
*četiri	*four	■	
*pet	*five		■
brojilo za kontrolno mjerenje potrošnje el.energije	kWh - metter		■
konzdator za kompezaciju jalove snage transformatora	capacitor for transformer reactive power compensation		■
javna rasvjeta	street lighting		■
odvodnici prenapona	surge arresters		■

